


INSTALLATION INSTRUCTIONS

PVC STRIP CURTAIN

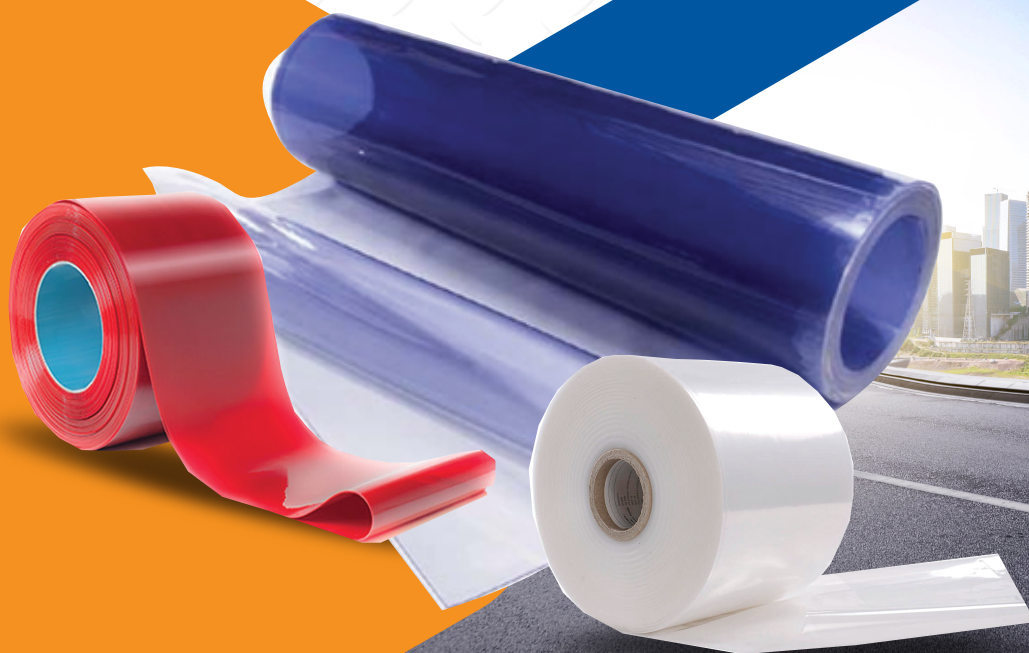

01 REQUEST BEFORE INSTALLATION

Do not attempt to install, make repairs or adjustments. Only a trained and authorized service technician should perform the installation process. Contact your local dealer or distributor for assistance.

Wear protective equipment before construction to ensure labor safety.

PREPARATION



Necessary equipment:

STT	DEVICE
1	Drill
2	Screwdriver
3	Plugging Chise
4	Hammer
5	Ruler
6	Bolt Anchor
7	Ladder
8	Nivo

CHECK THE PRODUCT



- ✓ Check the condition of the product (was it damaged in transit?).
- ✓ Fully check the accompanying materials when installing (electrical cabinets, warning stamps, user manual stamps).
- ✓ If any damage or loss is found, notify the carrier immediately.

Equipment included with the product:

- The Naviflex PVC strip curtains have been fixed to the hanging panel.
- Steel bar for hanging plastic curtain.


* Hanging plate is an indispensable accessory of the PVC strip curtain set, usually made of powder-coated iron or stainless steel, the product is fastened to the plastic curtain, keeping the plastic curtain fixed before being attached to the hanging bar.



PVC strip curtain is attached to hanging

◆ CHECK THE SIZE

- ✓ Check that all cell dimensions conform to the approved drawing. Use Nivo to check the straightness of the frame. Check the entire distance, if there is any size deviation of more than 10mm, you must immediately report to "Supervisor Sai Gon Nam Phat Joint Stock Company" for support.
- ✓ Determine the material of the door frame to conduct the connection of the hanging bar.

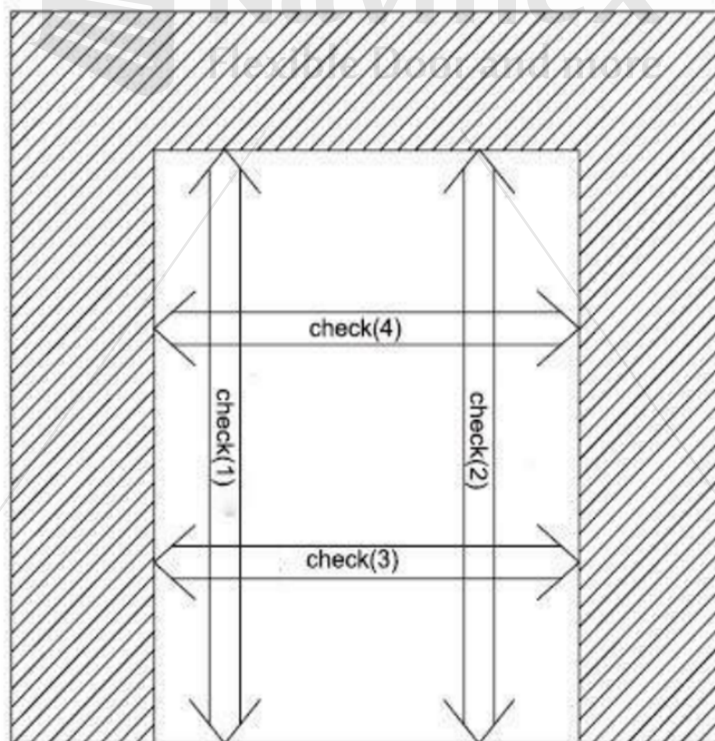

Overview of door





02 REQUEST AND STANDARD IN INSTALLATION

◆ INSTALL THE HANGING BAR ON THE DOOR FRAME AT THE PLACE WHERE THE PLASTIC IS HUNG

- Request: The door frame associated with the material surface must be sure to fix the curtains.
- ✓ Proceed: mark, drill, chisel to attach the switch, screw (depending on the surface) to fix the hanger to the frame material. (SGNP supervision will provide the linking method).



Screws are used to link the hanger to the frame

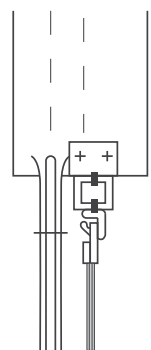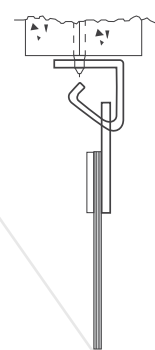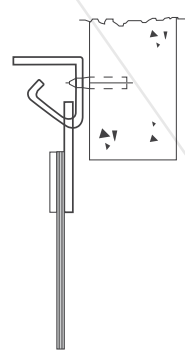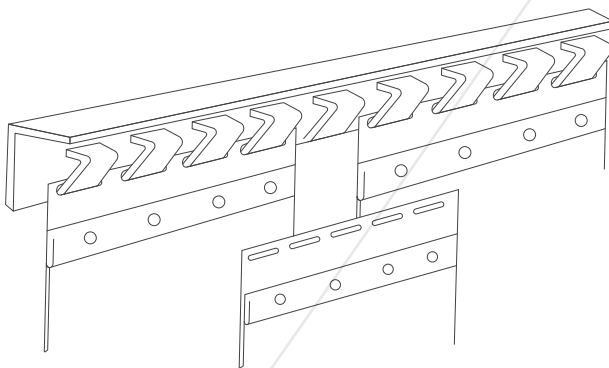


Some styles of fixing the hanging steel bar to the door frame

◆ HANGING PVC STRIP CURTAIN

- Request: The first hanging plate of the rear PVC strip curtain is overlaid with the last hanging plate of the front PVC to ensure coverage.

Proceed: Use fabricated PVC strip curtain strips to hang on the rod, stacking about 50 mm and 100 mm. Mounting the PVC strip curtain on the rod is very light so it can be easily assembled by one person. After all the curtains are fixed, we will have a complete set of curtains.

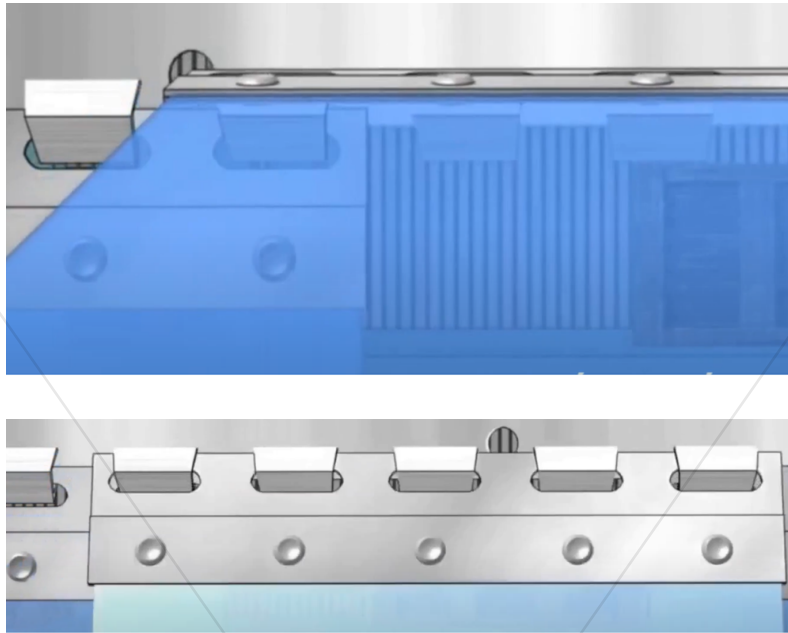

The back PVC strip curtain is inserted on the front PVC strip curtain screen

◆ CUT OFF THE EXCESS OF THE PVC STRIP CURTAIN

- Request: The tail of the curtain is cut long enough to cover the space of the door frame.
- ✓ Proceed: After the installation of the PVC strip curtain is completed, use a knife to cut the bottom of the curtain close to the ground of the PVC strip curtain, so that the PVC strip curtain is not damaged and easily moved back and forth.



The tail of the curtain is properly

◆ TEST OPERATION AFTER INSTALLATION

- Request: Strong hanging bar, PVC strip curtain covers the entire area of the doorway.
- ✓ Proceed: Visual inspection.

 If installing PVC strip curtain on outdoor doors, it is recommended to install additional windscreen fans to increase the ability to prevent insects and dust.

03 ♦ USES OF SOME PVC STRIP CURTAIN

✦ PVC strip curtain prevents insects from intrusion

<i>Smooth</i>		Thickness (mm)	Width (mm)
		2.0	200
<i>Doublecorrugated iron</i>		2.0	200
		3.0	300


✦ PVC strip curtain prevent heat loss with high temperature

<i>Smooth</i>		Thickness (mm)	Width (mm)
		2.0	200
<i>Doublecorrugated iron</i>		2.0	200
		3.0	300


✦ Transparent PVC Strip Curtain prevent heat lost, dust

<i>Smooth</i>		Thickness (mm)	Width (mm)
		2.0	200
<i>Double wave ribs</i>		2.0	200, 300
		3.0	200, 300

✦ PVC Strip Curtain to prevent static electricity

<i>Smooth</i>		Thickness (mm)	Width (mm)
		2.0	200
<i>Double wave ribs</i>		2.0	200
		3.0	300

✦ Welded spark-proof strip curtain

<i>Smooth</i>		Thickness (mm)	Width (mm)
		1.5	200
		2.0	200, 300
		3.0	200, 300

✦ Milky white strip curtain

<i>Smooth</i>		Thickness (mm)	Width (mm)
		2.0	200

Uses of some PVC strip curtain



NAVIFLEX INDUSTRIAL SYSTEM DOOR

✉ marketing@saigonnampat.vn
🌐 www.navidock.vn

HEAD OFFICE

📍 21 Quach Dinh Bao, Phu Thanh Ward, Tan Phu District, HCM City.
☎ (+84) 938 828 242

FACTORY

📍 No. 27A, Tan Tao, Tan Tao Industrial Park, Tan Tao A Ward, Binh Tan District, HCM City.
☎ (+84) 938 828 242

THE HANOI BRANCH

📍 A3-3205 Ecolife Building, 58 To Huu Street, Trung Van Ward, Nam Tu Liem District, HN.
☎ (+84) 24 7307 3339